



Starlette Plus

The small range of refrigeration dryers
0.6 - 5 m³/min




The application of high-quality air ensures continuity and reliability of industrial applications, the highest quality standards for finished products and the optimisation of production costs. Parker Hiross offers a range of refrigerated air drying solutions using advanced refrigeration technology. Starlette Plus is Parker Hiross' answer to the specific needs of the industrial user. Starlette Plus safeguards continuous performance and superior efficiency in every industrial compressed air application. It can easily be adapted to suit all working conditions, maintaining reliable dewpoint control and the lowest possible pressure drops and operating costs. With its state-of-the-art PlusPack heat exchangers (patent pending) and the most compact dimensions of any system in its class, Starlette Plus is the superior choice for any compressed air treatment application.

Product Features:

- Extremely compact
- Low operating costs
- Environmentally friendly
- High operating limits

Philosophy

Parker Hiross specialises in cooling, purification, and separation technologies, where compressed air and gas purity, product quality, technological excellence and global support are paramount. We design and manufacture compressed air treatment products and cooling equipment for many key industries where ease of integration, low cost of ownership and energy saving can make the difference. Parker Hiross has been supplying industry with high efficiency products with low lifetime costs and reduced CO2 emissions since 1964. Our philosophy 'to stand out from the crowd' is our credo, encouraging our employees to achieve continuous improvement and satisfy customer expectations.

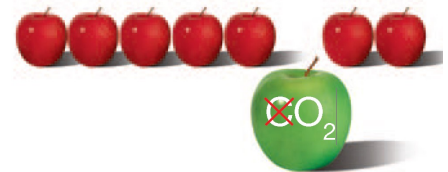

PlusPack 3-in-1 heat exchangers (patent pending), in solid aluminium with air-to-air free-cooler exchanger, evaporator and 'slow flow' demister separator and integrated air connections.

Features

- Reliable air-tight piston compressors which do not require preheating.
- Simple and secure refrigeration circuits which do not require adjustment during operation and undergo vigorous quality testing in production.
- Large adjustable condenser and fan compartments to guarantee optimum performance even in extreme conditions.
- Security protection in the refrigeration circuit, increasing reliability and safeguarding the air dryer.
- Simple disassembly, with easy access to the internal components for efficient maintenance.
- Drain positioned in a niche, allowing easy access without the need to remove the top panel.

Technical data

Model	technical data				dimensions (mm)			weight	Pre-filter	Post-filter
	air flow		abs. power	air connec.	width	height	depth	(kg)		
	m³/h	m³/min	kW		A	B	C			
SPL006	36	0.6	0.17	1/2"	450	430	210	19	GP-006-FX	HE-006-FX
SPL012	72	1.2	0.25	1/2"	500	505	210	23.5	GP-020-FX	HE-020-FX
SPL018	108	1.8	0.47	3/4"	520	565	225	26.5	GP-020-FX	HE-020-FX
SPL024	144	2.4	0.57	3/4"	520	565	225	31	GP-030-FX	HE-030-FX
SPL030	180	3	0.78	3/4"	520	565	225	35	GP-030-FX	HE-030-FX
SPL050	300	5	0.85	1 1/2"	555	600	425	58	GP-060-FX	HE-060-FX


Performances refer to air at FAD 20°C/1bar A, and the following working conditions: air suction 25°C/60%RH, 7 barg working pressure, pressure dew

Point in accordance with ISO8573-1, 25°C cooling air temperature, 35°C compressed air inlet temperature. All indicated data refers to DIN ISO7183. All models supplied with refrigerant R134a and for operation up to 16 barg. All models supplied with 230/1/50 power supply. Starlette Plus can

Air flow correction factors for differing working conditions

A) Working pressure	barg	3	4	5	6	7	8	9	10	11	12	13	14	15	16		
correction factors		0.73	0.83	0.9	0.95	1	1.03	1.07	1.09	1.12	1.13	1.15	1.17	1.18	1.19		
B) Ambient temperature	°C	20		25		30		38		40		45		50			
correction factors		1.25		1.19		1.12		1		0.96		0.89		0.81			
C) Air inlet temperature	°C	30		38		40		45		50		55		60		65	
correction factors		1.36		1		0.92		0.77		0.64		0.54		0.51		0.48	

To obtain the actual air flow multiply the nominal air flow by the above correction factors (ie. Air flow x A x B x C). For a precise selection always refer to the software selection program or contact your Parker partner.

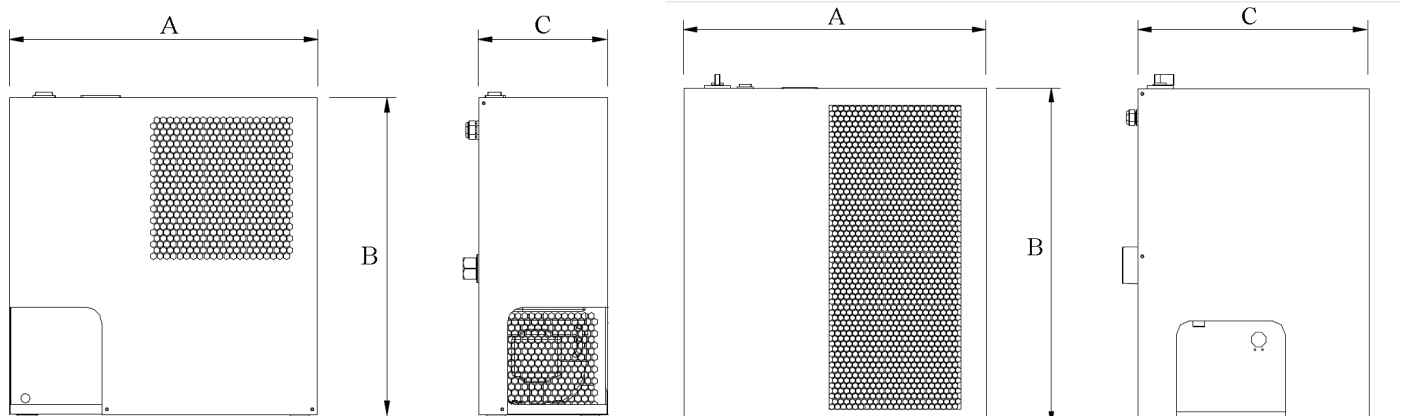

SPL006-SPL030

SPL050

Parker Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates, Dubai
Tel: +971 4 8127100
parker.me@parker.com

AT – Austria, Wiener Neustadt
Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe, Wiener Neustadt
Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AZ – Azerbaijan, Baku
Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles
Tel: +32 (0)67 280 900
parker.belgium@parker.com

BG – Bulgaria, Sofia
Tel: +359 2 980 1344
parker.bulgaria@parker.com

BY – Belarus, Minsk
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

CH – Switzerland, Etoy
Tel: +41 (0)21 821 87 00
parker.switzerland@parker.com

CZ – Czech Republic, Klecany
Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst
Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup
Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid
Tel: +34 902 330 001
parker.spain@parker.com

FI – Finland, Vantaa
Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve
Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens
Tel: +30 210 933 6450
parker.greece@parker.com

HU – Hungary, Budaörs
Tel: +36 23 885 470
parker.hungary@parker.com

IE – Ireland, Dublin
Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IL – Israel
Tel: +39 02 45 19 21
parker.israel@parker.com

IT – Italy, Corsico (MI)
Tel: +39 02 45 19 21
parker.italy@parker.com

KZ – Kazakhstan, Almaty
Tel: +7 7273 561 000
parker.easteurope@parker.com

NL – The Netherlands, Oldenzaal
Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Asker
Tel: +47 66 75 34 00
parker.norway@parker.com

PL – Poland, Warsaw
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal
Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest
Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow
Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga
Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SK – Slovakia, Banská Bystrica
Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto
Tel: +386 7 337 6650
parker.slovenia@parker.com

TR – Turkey, Istanbul
Tel: +90 216 4997081
parker.turkey@parker.com

UA – Ukraine, Kiev
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

UK – United Kingdom, Warwick
Tel: +44 (0)1926 317 878
parker.uk@parker.com

ZA – South Africa, Kempton Park
Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

North America

CA – Canada, Milton, Ontario
Tel: +1 905 693 3000

US – USA, Cleveland
Tel: +1 216 896 3000

Asia Pacific

AU – Australia, Castle Hill
Tel: +61 (0)2-9634 7777

CN – China, Shanghai
Tel: +86 21 2899 5000

HK – Hong Kong
Tel: +852 2428 8008

IN – India, Mumbai
Tel: +91 22 6513 7081-85

JP – Japan, Tokyo
Tel: +81 (0)3 6408 3901

KR – South Korea, Seoul
Tel: +82 2 559 0400

MY – Malaysia, Shah Alam
Tel: +60 3 7849 0800

NZ – New Zealand, Mt Wellington
Tel: +64 9 574 1744

SG – Singapore
Tel: +65 6887 6300

TH – Thailand, Bangkok
Tel: +662 186 7000

TW – Taiwan, Taipei
Tel: +886 2 2298 8987

South America

AR – Argentina, Buenos Aires
Tel: +54 3327 44 4129

BR – Brazil, Sao Jose dos Campos
Tel: +55 800 727 5374

CL – Chile, Santiago
Tel: +56 2 623 1216

MX – Mexico, Toluca
Tel: +52 72 2275 4200

European Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

China Filtration Division
No.9 Jinshun Road, Zhuqiao Town,
Pudong New Area, Shanghai
201323, China
Tel: (86) 21 2067 2067
Fax: (86) 21 2067 2020
www.parker.com

